

The logo for 'inter noise' features the word 'inter' in green, a red cross symbol, and the word 'noise' in green.

2013 | INNSBRUCK | AUSTRIA

15.-18. SEPTEMBER 2013

NOISE CONTROL FOR QUALITY OF LIFE

Study on the amplitude modulation of wind turbine noise: part 2- Auditory experiments

Sakae Yokoyama¹, Shinichi Sakamoto², and Hideki Tachibana³

^{1,2}Institute of Industrial Science, The University of Tokyo

Komaba 4-6-1, Meguro, Tokyo, Japan

³Chiba Institute of Technology

ABSTRACT

Amplitude modulation (AM) sound, so called swish sound, is generally contained in wind turbine noise (WTN) and it causes serious annoyance in the areas surrounding wind farms. Therefore, the methods to assess the characteristics of this kind of sound should be investigated in both viewpoints, physically and psycho-acoustically. Regarding the latter problem, auditory experiments were performed by using a test facility capable of reproducing low frequency sounds including infrasound. As the first experiment, the fluctuation sensation caused by AM sounds was examined by using actual WTNs recorded on sites, in which the frequency components were limited in steps by low-pass filtering processing. As a result, it has been found that the fluctuation sensation is apt to cause at frequencies higher than about 125 Hz. As the second experiment, the noisiness sensation to AM sounds were examined by using artificially synthesized sounds by changing their modulation depth in eight steps. As a result, a tendency has been seen that noisiness increases with the increase of AM depth even if the time-averaged sound pressure level is the same.

Key words: Low frequency noise, Wind turbine noise, Swish sound, Amplitude modulation, Noisiness impression, Fluctuation sensation, Auditory experiment

1. INTRODUCTION

The authors have been carrying out a synthetic research program on wind turbine noise titled “Research on the Evaluation of Human Impact of Low Frequency Noise from Wind Turbine Generators” from the 2010 fiscal year [1]. This research program consists of field measurement [2-5], social survey on the response of nearby residents [6-7], and laboratory experiments [8-11]. Regarding the third topic, we have been making a series of subjective experiments regarding human audibility of low frequency sounds. In these experiments, the thresholds of hearing in low frequency range [8,11] and the human hearing sensation to WTN [9-11] have been examined.

In this study, to investigate the method of assessing AM sounds, two kinds of auditory experiments were performed. As the first experiment, the fluctuation sensation caused by AM sounds was examined by using actual WTNs. Following the study, the noisiness sensation was investigated by using artificially synthesized sounds.

¹ sakae@iis.u-tokyo.ac.jp

² sakamo@iis.u-tokyo.ac.jp

³ pon-t@iis.u-tokyo.ac.jp

2. EXPERIMENTAL SYSTEM

In this study, the same experimental facility as used in the former auditory experiments on low frequency noise [9, 11] was also used. The facility is constructed in the Institute of Industrial Science, The University of Tokyo as shown in Figure 1 and Picture 1. To produce low frequency sounds, sixteen woofers with a diameter of 40 cm (FOSTEX, FW405N, lowest resonance frequency: 27 Hz) were installed on the partition wall between a reverberation room and an anechoic room. For the production of mid/high frequency components up to 8 kHz, a wide-range loudspeaker was set at the centre point of the 16 woofers. The cross-over frequency between the two systems was set at 224 Hz. The listening position was set at a point of 3.5 m from the center position of the loudspeakers. To correct the frequency characteristic of the total system, the digital inverse-filtering technique was applied.

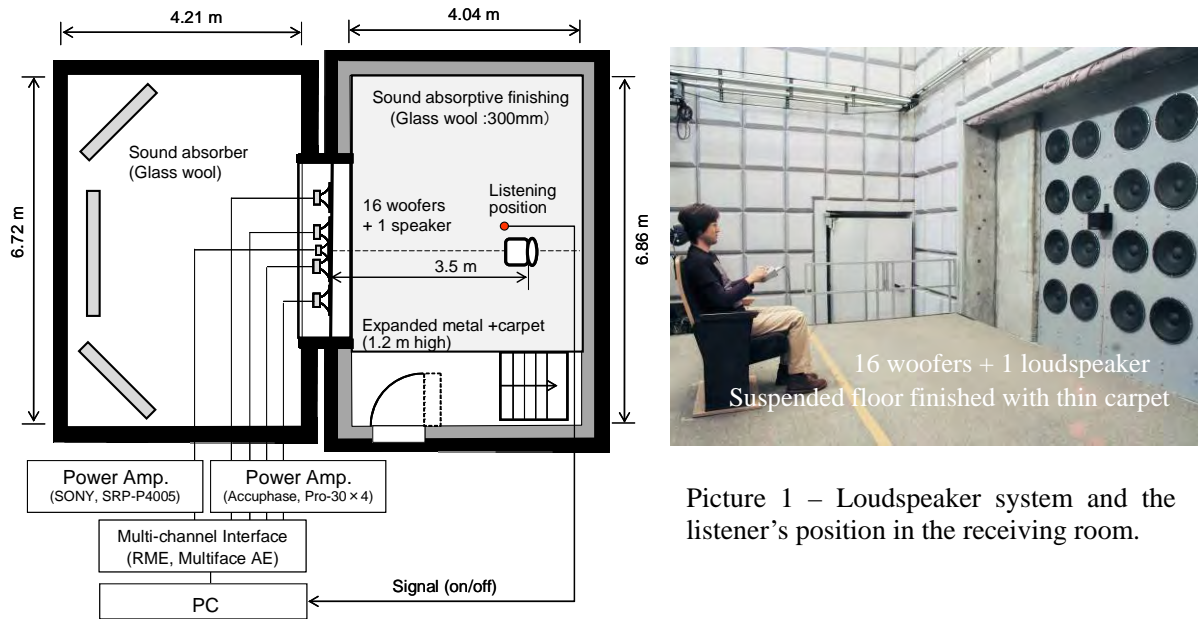


Figure 1 – Experimental system.

3. EXPERIMENT-1

To examine the fluctuation sensation caused by AM sounds contained in WTNs, auditory experiment was performed by using actual WTNs recorded on sites.

3.1 Experimental conditions

For the experiment, four actual WTNs including AM sounds recorded around wind farms in Japan were edited to have a duration time of 15 s (see Table 1). The A-weighted time-averaged sound pressure levels for the duration time ($L_{Aeq,15s}$) of the sounds were distributed from 35.4 to 46.4 dB. They are typical WTNs observed outside in residential areas around wind farms. Figure 2 shows the A-weighted sound pressure levels by FAST dynamic characteristics ($L_{A,F}$) of the sounds. The AM depth ($D_{AM,15s}$) [3] (See appendix) of the sounds are distributed from 3.5 to 5.2 dB. To avoid click sounds, the signals were gradually risen/fallen with a time of 0.5 s, respectively. Figure 3 shows the sound pressure levels in 1/3 octave bands of these test sounds which were measured in the absence of the listener at the listening position where the centre of the listener's head would be. In order to investigate the “fluctuation sensation” of the low frequency components contained in WTNs, test sounds were made by limiting the frequency components of respective test sounds using low-pass-filtering processing (shown in Figure 4; the center frequency (f_{center}) of 1/3 octave band is used as the nominal cut-off frequency in this study). The cut-off frequencies were set at the 1/1 octave series from 1 kHz to 250 Hz and the 1/3 octave series from 125 Hz to 20 Hz, inclusive (12 in total). As an example, Figure 5 shows the original test sound No.1 and its variations made in such a way mentioned above.

Table 1 – Test sounds used in this study.

| No. | Distance from the nearest wind turbine | $L_{Aeq,15s}$ [dB] | $D_{AM,15s}$ [dB] |
|-----|--|--------------------|-------------------|
| 1 | 252 m | 46.4 | 4.0 |
| 2 | 416 m | 41.3 | 4.2 |
| 3 | 561 m | 41.9 | 3.5 |
| 4 | 908 m | 35.4 | 5.2 |

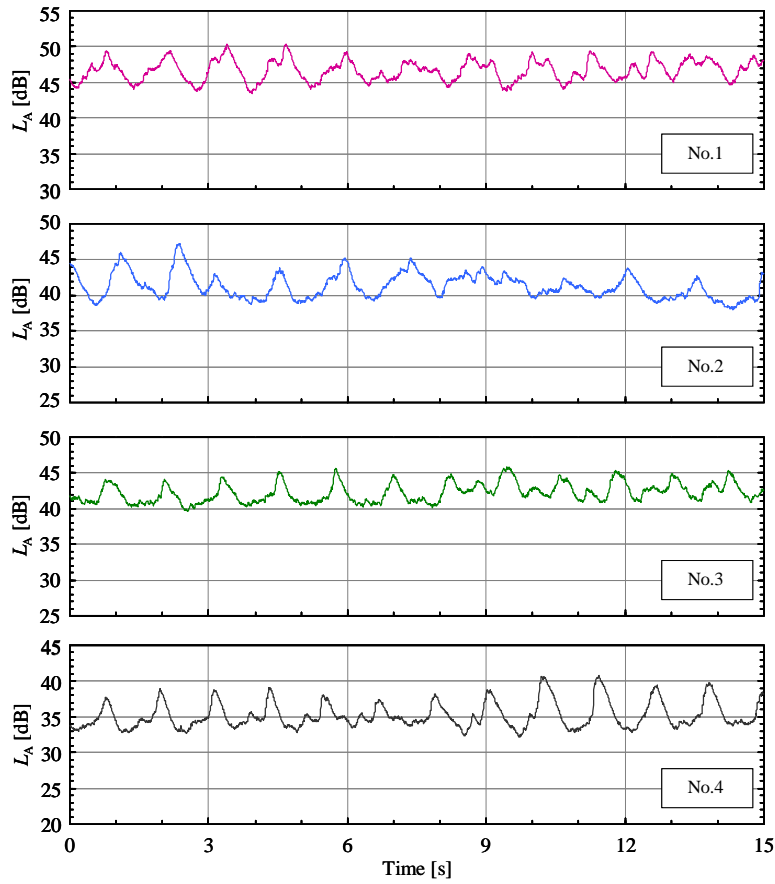


Figure 2 – The time pattern of the test signals.

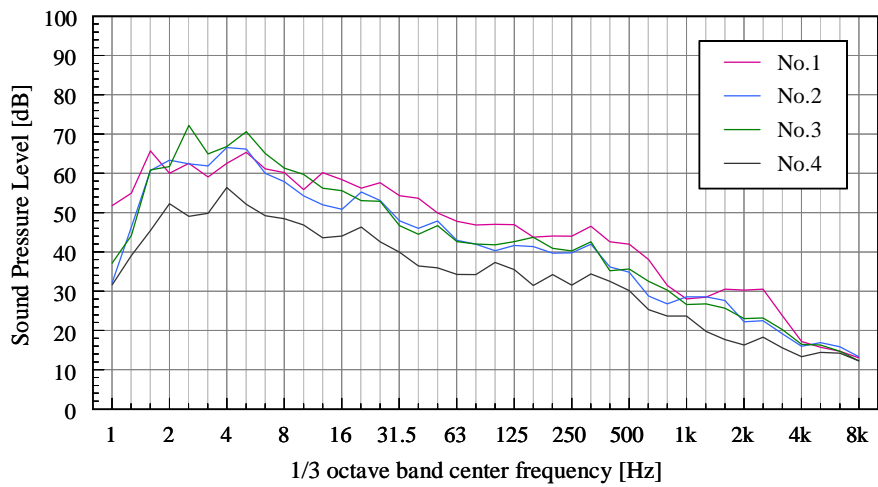


Figure 3 – Sound pressure levels in 1/3 octave bands of the test sounds.

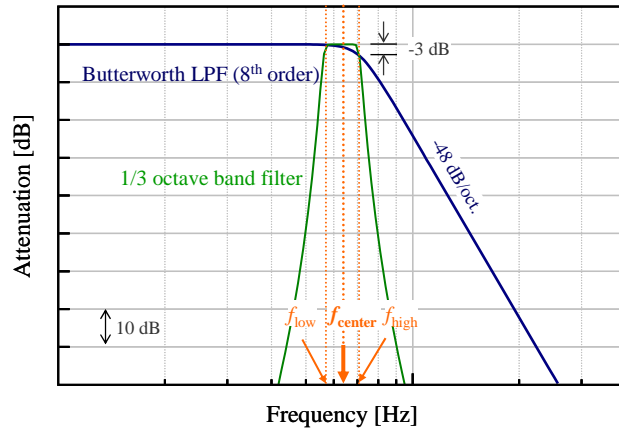


Figure 4 – Frequency characteristics of the low-pass filter.

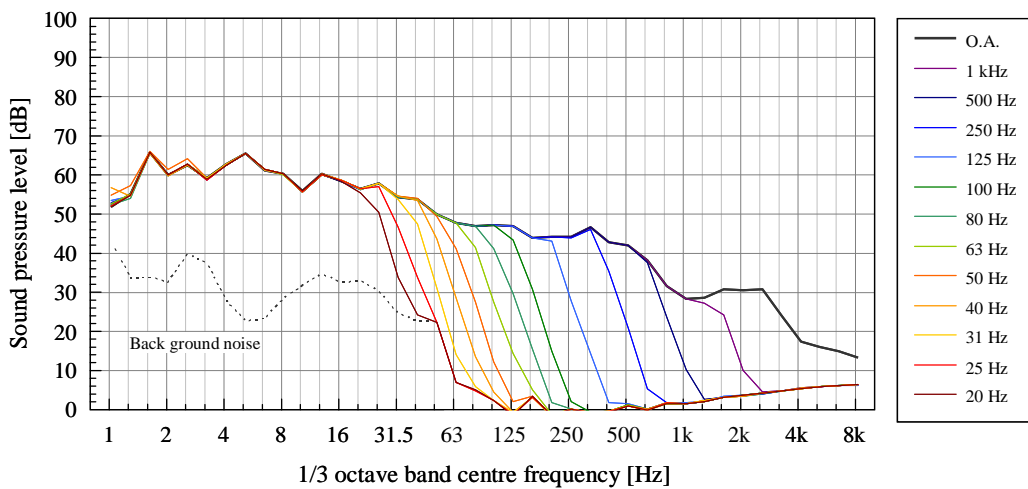


Figure 5 – Sound pressure levels in 1/3 octave bands of the original test sound No.1 and its variations made by low-pass filtering.

3.2 Experimental procedure

In advance of the auditory experiment, video recording of an actual rotating wind turbine was presented to each subject and he/she was informed that regular fluctuation sounds could be heard in the residential area around the wind farm generated by the rotation of the blades. In the experiment, the subject sat straight on a chair to keep his/her head near the headrest in the test room (see Picture 1). Firstly, the subject was asked to judge the “audibility/sensitivity” of the test sound. In case where the subject judged the test sound “audible/sensible”, he/she was also asked to answer the extent of the “regular fluctuation sensation” in three-step category (see Table 2). The total time needed to complete the test on 52 test sounds (the test sounds No.1 to No.4; 12 modified sounds processed by the low-pass-filtering and original sound) was about 30 minutes including rest times in between. In this experiment, 10 subjects from 21 year-old to 25 year-old (7 males and 3 females) with otologically normal hearing abilities participated. This experiment was performed according to the ethical code of The University of Tokyo.

Table 2 – 3-step category.

| | |
|---|---|
| 0 | Regular fluctuation sensation is <i>not felt at all</i> . |
| 1 | Regular fluctuation sensation is felt <i>slightly</i> . |
| 2 | Regular fluctuation sensation is felt <i>clearly</i> . |

3.3 Experimental results

As for the “audibility/sensitivity”, the ratio of the experimental results of “audible/sensible” was analyzed for each test sound. In the result shown in Figure 6, it is seen that the sounds of which cut-off frequency was higher than 80 Hz were 100% judged to be “audible/sensible”, whereas the response of “audible/sensible” decreased as the cut-off frequency became lower. The tendency that the “audible/sensible” judgment increases as the level of the test sound becomes higher is seen. To see the result for test sound No.1 which was the highest among the test sounds, the response of the “audible/sensible” sensation was 0 % under the condition of cut-off frequency of 25 Hz or lower.

To investigate the extent of the “regular fluctuation sensation” on AM sounds, the ratio of the experimental results of “regularly fluctuating (category 1 and 2; in the 3-step category)” (see Table 2) was analyzed for each test sound. In the result shown in Figure 7, it is seen that the sounds with cut-off frequency higher than 500 Hz were 100% judged to be “regularly fluctuating”, whereas the ratio of the sensation decreased as the cut-off frequency became lower. Under the conditions of cut-off frequency of 50 Hz or lower, the ratio of judgment of “regularly fluctuating” was 0%.

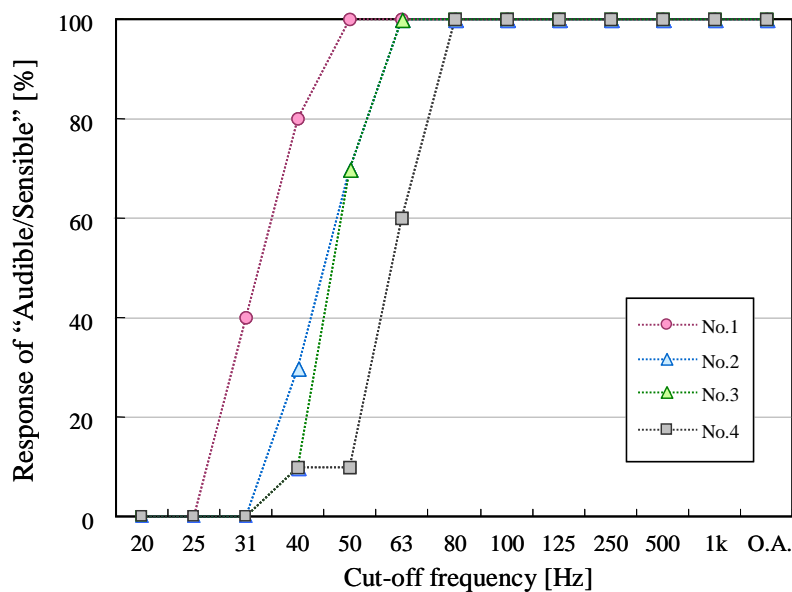


Figure 6 – The ratio of the experimental results “audible/sensible” for each test sound.

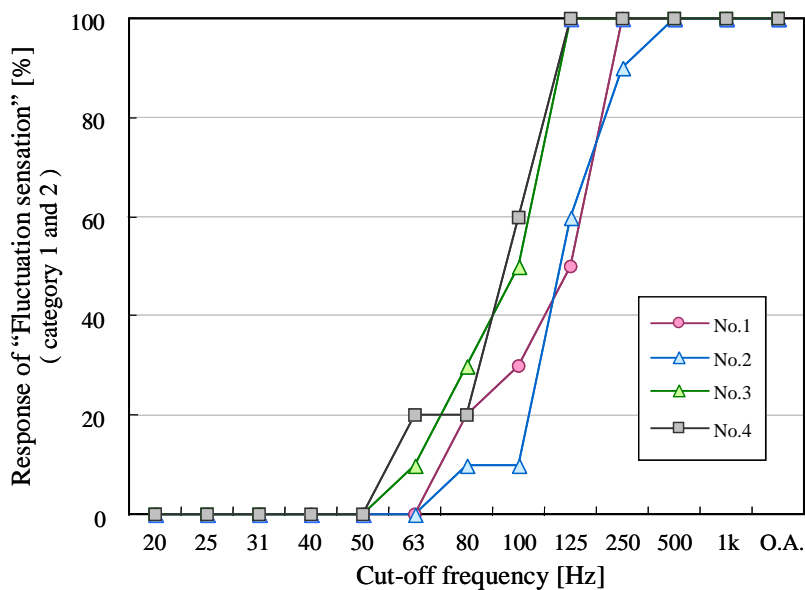


Figure 7 – The ratio of the experimental results “fluctuation sensation” for each test sound.

4. EXPERIMENT-2

To examine the noisiness sensation to AM sounds contained in WTNs, auditory experiment was performed by using an artificially synthesized sound by changing its modulation depth.

4.1 Experimental conditions

To investigate the relationship between noisiness sensation and the strength of AM, noisiness matching test was performed. In this experiment, an artificially synthesized sound modeling the frequency characteristics of the general WTNs (-4 dB/octave in band spectrum) was edited to have a duration time of 10 s. As for the standard stimulus (Ss), the synthesized sound was set at 2-step; 35 and 45 dB in A-weighted time averaged S.P.L. ($L_{Aeq,10s}$) at the listening position. As for the comparison stimulus (Sc), the synthesized sound was modified so that its AM index (ΔL) varied in 8-step (see Table 3). In this study, the AM index (ΔL) was defined as shown in figure 8. In Table 3, the AM depth ($D_{AM, 15s}$) [3] (See appendix) of the reproduced sounds are also shown. Figure 9 shows the variations of the test signals changed their AM index. To avoid click sounds, the each sound was gradually risen/fallen with a time of 0.5 s.

Table 3 – Strength of AM of the comparison stimuli (Sc).

| AM index (ΔL) [dB] | D_{AM} [dB] (Ss: 35 dB) | D_{AM} [dB] (Ss: 45 dB) |
|------------------------------|---------------------------|---------------------------|
| 0 | 0.8 | 0.8 |
| 1 | 1.2 | 1.1 |
| 2 | 1.7 | 1.7 |
| 3 | 2.3 | 2.3 |
| 4 | 3.0 | 3.0 |
| 6 | 4.3 | 4.3 |
| 8 | 5.5 | 5.6 |
| 10 | 6.7 | 6.9 |

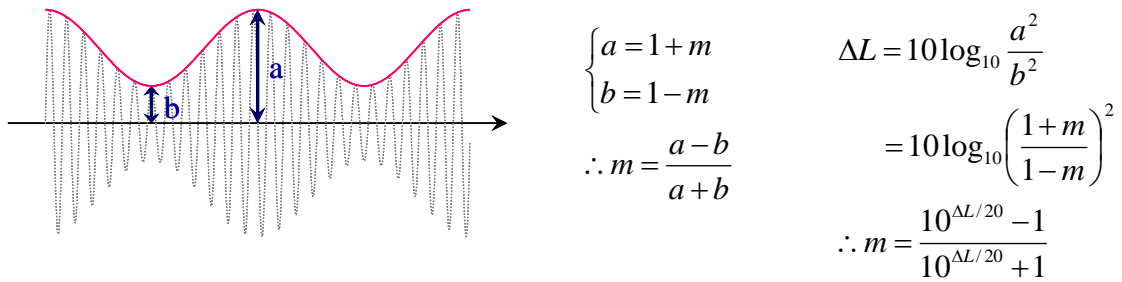


Figure 8 – Definition of the AM index; ΔL .

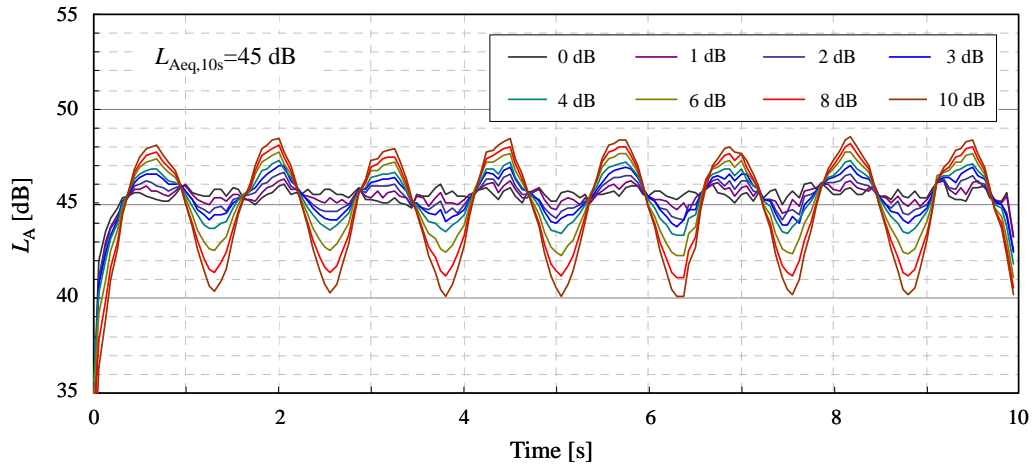


Figure 9 – Variations of the test signals modulated in 8 steps (ΔL).

4.2 Experimental procedure

As the test procedure, the method of adjustment by subject was applied. The experimental system was shown in Figure 10. In each condition, the standard stimulus (S_s) was firstly presented and secondly the comparison stimulus (S_c) was presented. After that, the subject was asked to adjust the “noisiness” of S_c to that of S_s by using a volume controller (see Picture 2). For the ascending/descending series in the case of S_s equal to 45 dBA, as the initial condition, S_c was set at 30/60 dB, respectively. The couple of S_s and S_c was repeated until each subject finished the adjustment. For each experimental condition, four trials (ascending/descending/ ascending/ descending) were performed. For each test sound, the subject was also asked to express orally his/her impression on S_c by using arbitrary onomatopoeic word. The total time needed to complete the test of 16 test sounds was about 1.5 hours including rest times in between. In this experiment, the test subjects were the same participated in the former experiment.

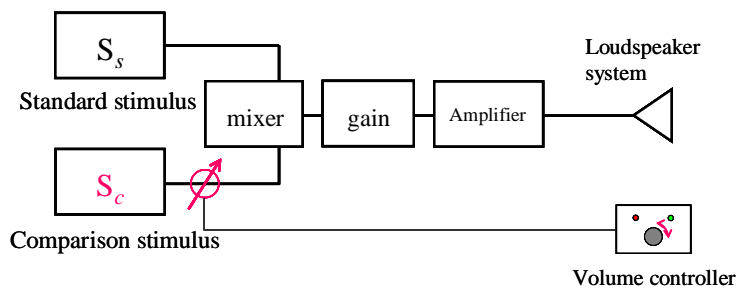


Figure 10 – Experimental system for the noisiness matching test.



Picture 2 – Volume controller used in the matching test.

4.3 Experimental results

Figure 11 show the experimental results of the noisiness test performed by changing the AM depth of the model noise in steps. In these figures, X-axis indicates AM index (ΔL) of S_c and Y-axis indicates the adjusted level in $L_{Aeq,10s}$. In the both of the figures, 0 dB (Y-axis; adjusted level) means the level of S_s , the gray plots are the levels of adjusted S_c by each subject, the red ones are the arithmetic average of the levels of adjusted S_c by all subjects and the vertical lines are the standard deviations. In these results, it is seen that the averaged level of adjusted S_c decreased as the AM index became higher, whereas its averaged value held around 0 in the case where the index was less than 1

dB. It is also seen that the standard deviation increased as the index became lower. These results show that “noisiness” increased with the increase of AM index.

From the result of expression by using an onomatopoeic word for each test sound, the ratio of “fluctuation sensation” was calculated by applying the logistic regression analysis. In this study, such onomatopoeic words as “Zah, Zah”, “Zahn, Zahn”, “Guon, Guon” were regard as “fluctuating”. Figure 12 shows the relationship between AM index (ΔL) of Sc and the ratio of “fluctuating”. In the result, it is seen that the “fluctuating” was caused when AM index was higher than 2.0 dB (corresponding to D_{AM} equal to 1.7 dBA). This tendency is consistent with the reference [12].

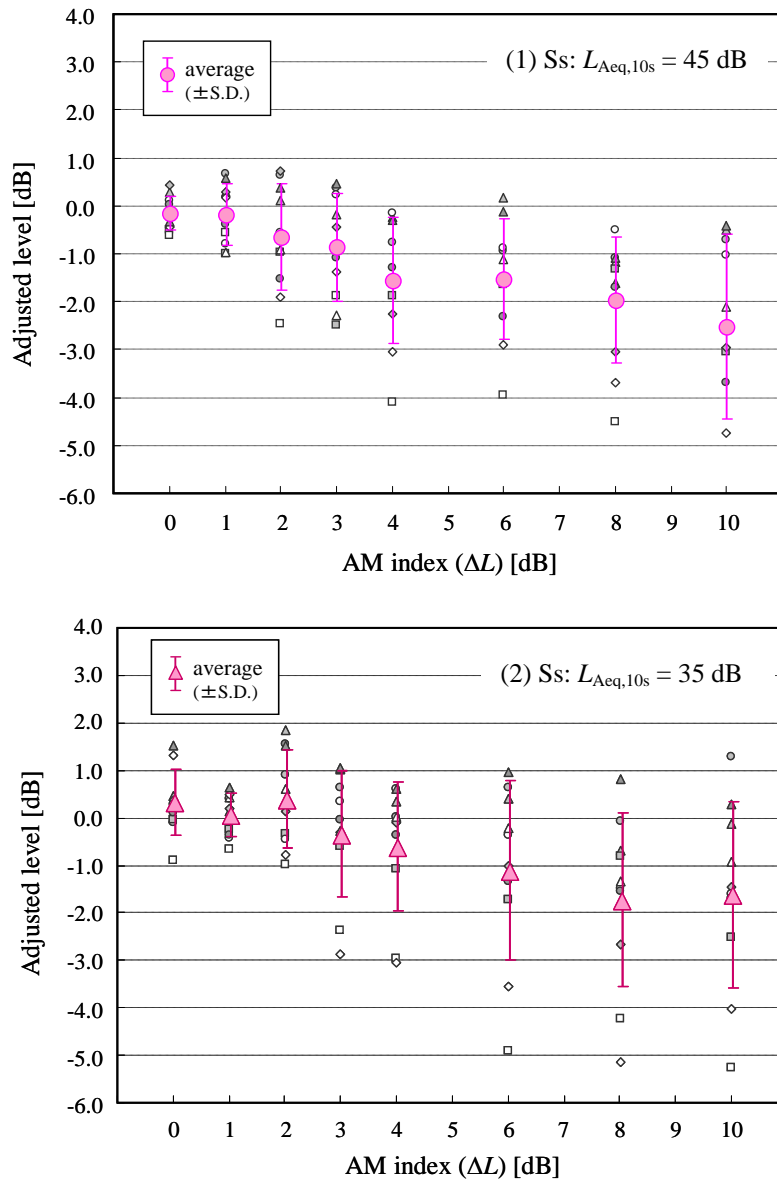


Figure 11 – Experimental results of noisiness matching.

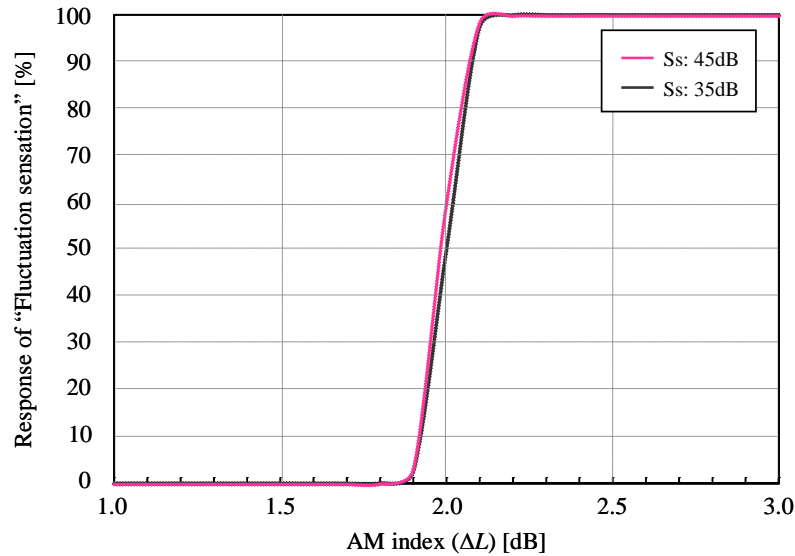


Figure 12 – Fluctuation sensation vs. AM index (ΔL) .

5. CONCLUSIONS

In this study, the effect of amplitude modulation sounds generally contained in wind turbine noises has been investigated by using the actual noises recorded on sites and a model sound representing general wind turbine noises. From the result of the experiment for the sensation of fluctuation, it has been found that the sensation is apt to cause at frequencies higher than around 100 Hz. From the result of second experiment, the fluctuation sensation has been confirmed under the condition where AM index ΔL is higher than 2.0 dB (corresponding to D_{AM} higher than 1.7 dBA).

ACKNOWLEDGEMENTS

The authors also would like to express their appreciation to Prof. Seiichiro Namba, Prof. Sonoko Kuwano and Prof. Yōiti Suzuki for their helpful advice. This study was performed as a part of the research program on low frequency noise sponsored by the Ministry of the Environment, Japan.

REFERENCES

- [1] H. Tachibana, H. Yano, S. Sakamoto and S. Sueoka, “Synthetic research program on wind turbine noise in Japan,” Proc. Inter-noise 2012, (2012).
- [2] H. Tachibana, H. Yano and S. Sueoka, “Nationwide field measurements of wind turbine noise in Japan,” Proc. Inter-noise 2013, (2013).
- [3] A. Fukushima, K. Yamamoto, H. Uchida, S. Sueoka, T. Kobayashi and H. Tachibana, “Study on the amplitude modulation of wind turbine noise: part 1-Physical investigation,” Proc. Inter-noise 2013, (2013).
- [4] H. Tachibana, H. Yano and A. Fukushima, “Assessment of wind turbine noise in immission areas,” Proc. 5th International Conference on Wind Turbine Noise, (2013).
- [5] H. Yano, T. Ohta and H. Tachibana, “Development of measurement system for wind turbine noise,” Proc. 15th Low Frequency Noise and Vibration and its Control, (2012).
- [6] S. Kuwano, T. Yano, T. Kageyama, S. Sueoka and H. Tachibana, “Social survey on community response to wind turbine noise in Japan,” Proc. Inter-noise 2013.
- [7] T. Yano, S. Kuwano, T. Kageyama, S. Sueoka and H. Tachibana, “Dose-response relationships for wind turbine noise in Japan”, Proc. Inter-noise 2013 (2013).
- [8] H. Tachibana, S. Sakamoto, S. Yokoyama and H. Yano, “Audibility of low frequency sounds – Part 1: Experiment on hearing threshold for pure tones,” Proc. 15th Low Frequency Noise and Vibration and its Control, (2012).
- [9] S. Yokoyama, S. Sakamoto H. Yano and H. Tachibana, “Audibility of low frequency sounds – Part 2:

Audibility of low frequency components in wind turbine noises,” Proc. 15th Low Frequency Noise and Vibration and its Control, (2012).

- [10] S. Sakamoto, S. Yokoyama and H. Tachibana, “Loudness evaluation of general environmental noises containing low frequency components,” Proc. Inter-noise 2013, (2013).
- [11] Sakae Yokoyama, Shinichi Sakamoto and Hideki Tachibana, “Perception of low frequency components contained in wind turbine noise,” Proc. 5th International Conference on Wind Turbine Noise, (2013).
- [12] D. Bowdler and G. Leventhall, *Wind turbine noise*, Multi-Science Publishing Co., Brentwood, Essex, 2011).

APPENDIX

In this study, the difference of the A-weighted sound pressure levels measured through FAST and SLOW dynamic characteristics of a sound level meter ($L_{A,F}(t)$ and $L_{A,S}(t)$, respectively) is calculated as follows:

$$\Delta L_A(t) = L_{A,F}(t) - L_{A,S}(t)$$

In order to evaluate the magnitude of AM statistically, the AM depth is defined as the 90 % range of $\Delta L_A(t)$. That is,

$$D_{AM} = \Delta L_{A,5} - \Delta L_{A,95}$$

where, D_{AM} is the AM depth and $\Delta L_{A,5}$ and $\Delta L_{A,95}$ are the 5 % and 95 % A-weighted sound pressure levels [dB], respectively.